

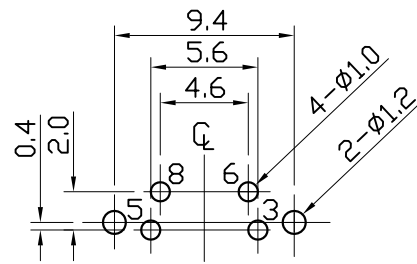


Specification:



Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 100M Ohm Min; AT 500V DC.
 Rated Voltage And Current: DC12V.2A Max; AC 100V.1A Max.
 Dielectric Withstanding Voltage: 250V AC For 1 Minute.
 Durability (Life Test): 100 Cycles.
 Insertion Force: 4.0KG Maximum.
 Extraction Force: 0.9KG Minimum.

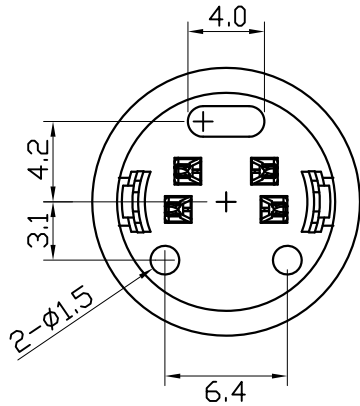

COMPONENT SIDE
(PCB LAYOUT)

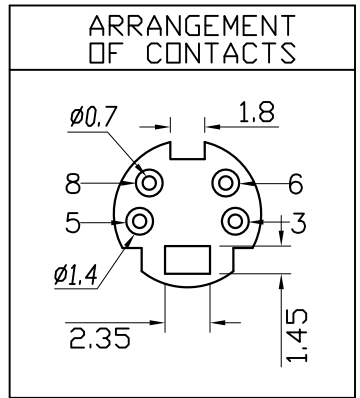

PROPRIETARY NOTE:
 This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

| | | |
|---|-----------------|--|
| .X ± 0.30 | APPROVED: Chris |  http://www.rego.com.tw |
| .XX ± 0.20 | CHECKED: Denny | |
| .XXX ± 0.15 | DRAWN: Bryan | |
| X* ± 3' | | |
| UNITS: mm | SCALE: NONE | TITLE: MINI DIN JACK 4 POSITIONS VERTICAL |
|  | | PART NO: 80203-508V4L |
| | | SHEET: 1 OF 1 |

| NO. | NAME | MATERIAL | FINISH | Q'TY | REMARK |
|-----|---------------|--------------------|---------------|------|----------------|
| 1 | HOUSING | PBT G.F. | BLACK | 1 | |
| 2 | CONTACT TERM. | PHOS. BRONZE T:0.2 | SILVER PLATED | 4 | SILVER:20~30u' |
| 3 | GROUND TERM. | BRASS T:0.3 | TIN PLATED | 1 | TIN:120~200u' |

| | |
|-----|------------|
| A | 03.15.2016 |
| REV | DATE |

1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F

A
B
C
D
E
F

1 2 3 4 5 6 7 8 9 10