


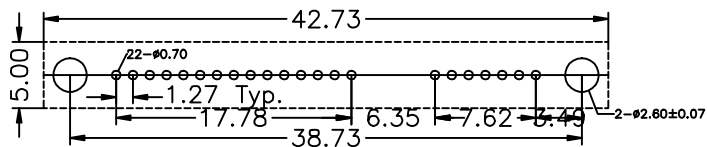

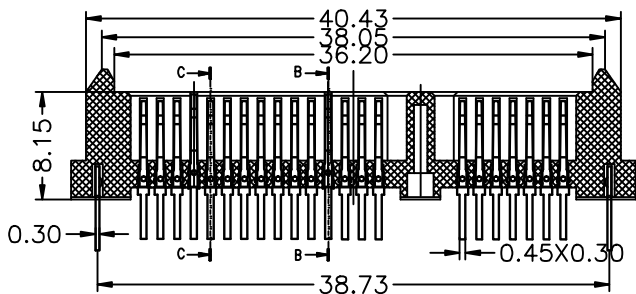


1 2 3 4 5 6 7 8 9 10

A  
B  
C  
D  
E  
F



NOTES:

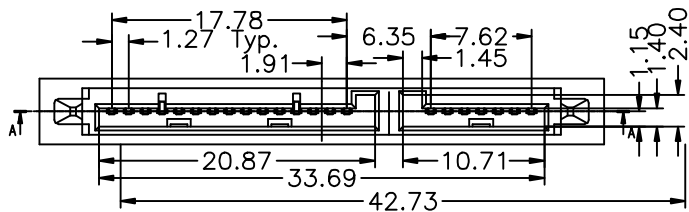

1. Material:  
Housing: LCP+50%G.F, UL 94V-0 Rated.  
Color: Black.  
Contact: Phosphor Bronze.  
Plating: Gold Plating over Nickel on Contact Area.  
Tin Plating on Solder Tail.  
Harpoon: Brass.  
Plating: Tin Plating over Nickel.
2. Mechanical:  
Insertion Force: 45N Max.  
Withdrawal Force: 10N Min.  
Durability: 500 Cycles
3. Electrical Specification:  
Operation Voltage: 100VAC Max.  
Current Rating: 1.5 Ampere per Contact.  
Contact Resistance: 30mΩ Max.  
Insulation Resistance: 1000MΩ Min.  
Dielectric Withstanding Voltage: 500 VAC.
4. Environmental:  
Operating Temperature: -55°C to +85°C

Part Number:

861SAT-F22VD300D

Serial ATA Series  0D: Single Row H=9.85mm  
 F: Female Type  Metal Post Distance 38.73mm  
 22: 7+15Pins  0: Black Color  
 V: Vertical Type  3: 15u" Plating  
 D: DIP Type

PROPRIETARY NOTE:  
 This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.30	APPROVED:	 <a href="http://www.rego.com.tw">http://www.rego.com.tw</a> Serial ATA 7+15P Female, Vertical, Single Row DIP H=9.85mm, Metal Post Distance 38.73mm
.XX ± 0.20	CHECKED:	
.XXX ± 0.15	DRAWN:	
X* ± 3'		
	UNITS:	SCALE:
	mm	NONE

A	RELEASE	01.15.2007
REV	DESCRIPTION	DATE

1 2 3 4 5 6 7 8 9 10