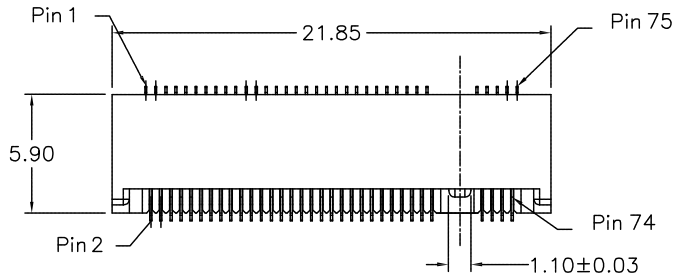

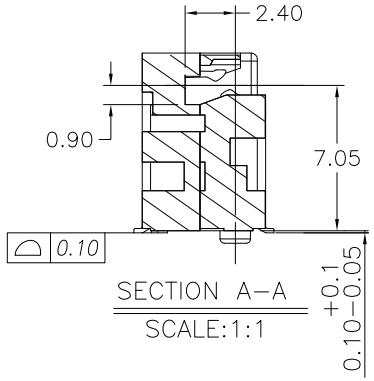

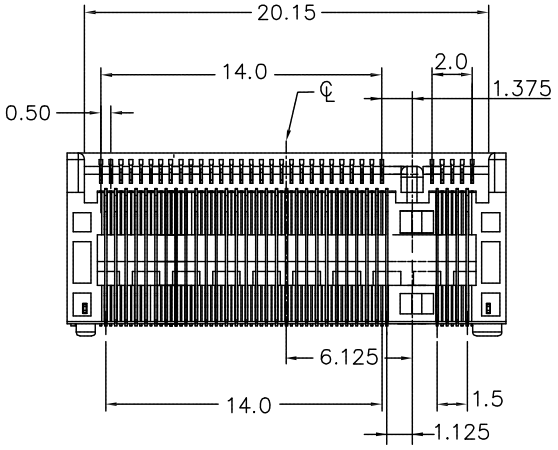



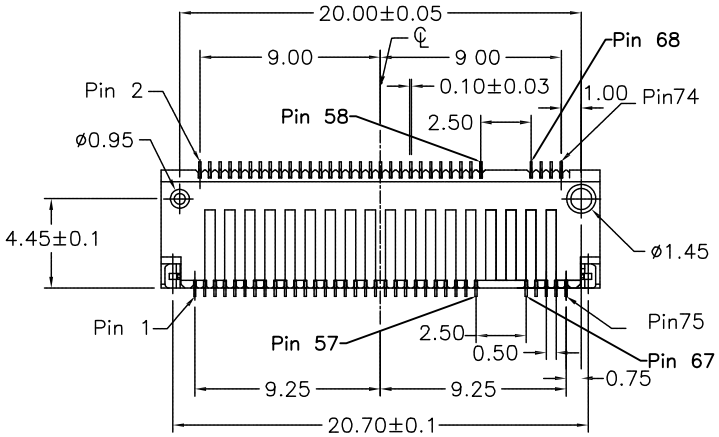

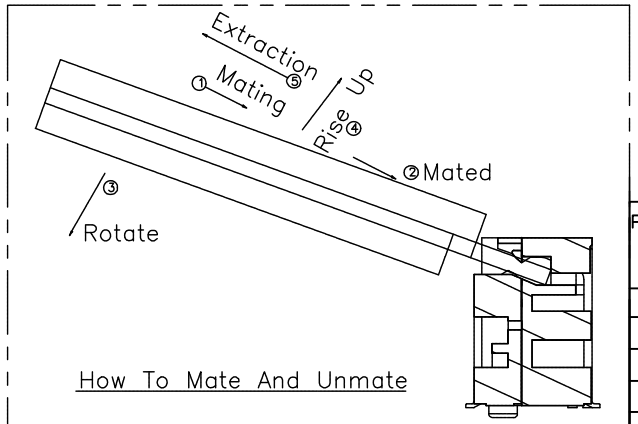

Material:

Housing: High Temperature Plastic UL94V-0, Black.
Contacts: Copper Alloy.
Solder Pad: Metal, Matte Tin Plated.

Electrical Characteristics:

Current Rating: 0.5 AMP.
Insulator Resistance: 500MΩ min. at DC 500V.
Contact Resistance: 55mΩ max.
Operating Temperature: -40°C~+80°C.

***RoHS Compliant**

8038402- 67 G 00 M 7 T

- Series
- No. of Pin Count
- G: Gold Plated
- 00: G/F
- M: Key M
- 7: 8.5mm Height
- T: Tape & Reel Package

REV	DATE
A	06.24.2015

PROPRIETARY NOTE:
This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.30	APPROVED: Chris	REGO® http://www.rego.com.tw	
.XX ± 0.20	CHECKED: Denny		
.XXX± 0.15	DRAWN: Bryan	TITLE: M.2 (NGFF) Connector 8.5H	
X° ± 3°	UNITS: mm	SCALE: NONE	PART NO:8038402–67G00M7T
			SHEET: 1 OF 2

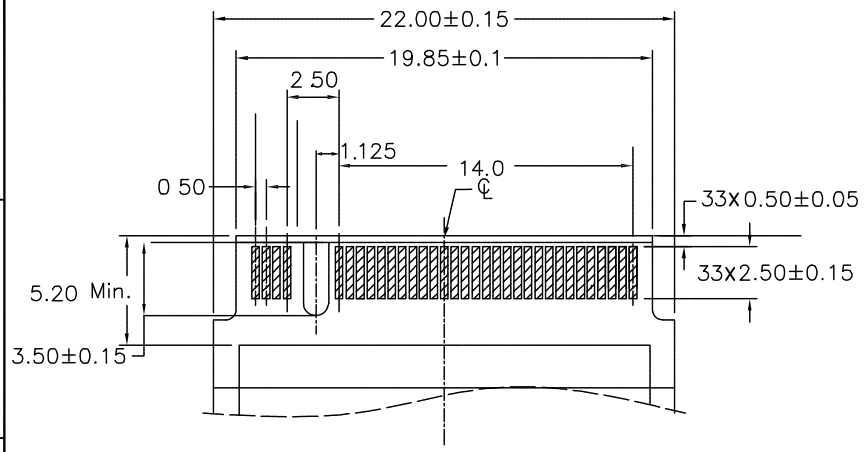

Bottom Side

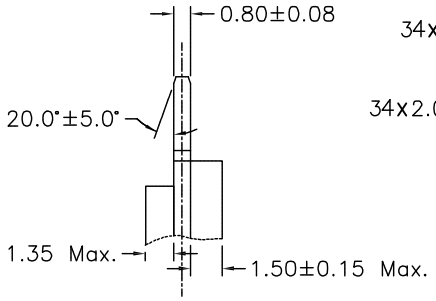

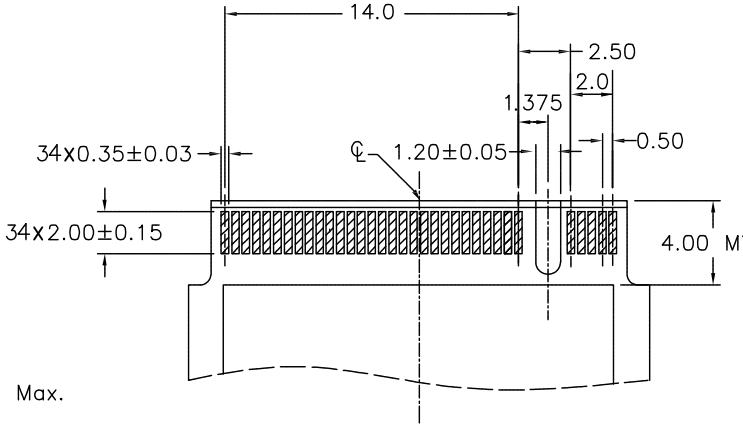

Top Side

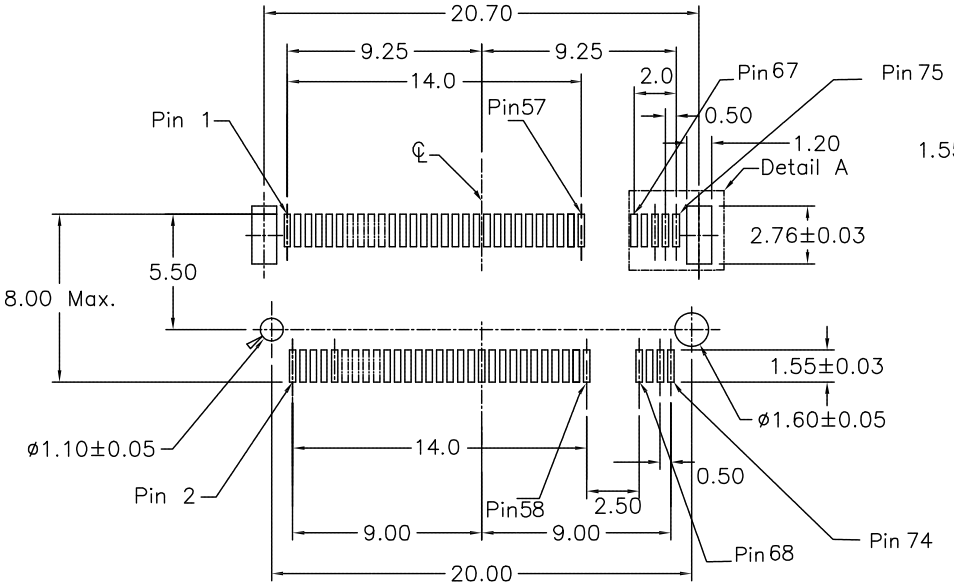

P.C Board Layout

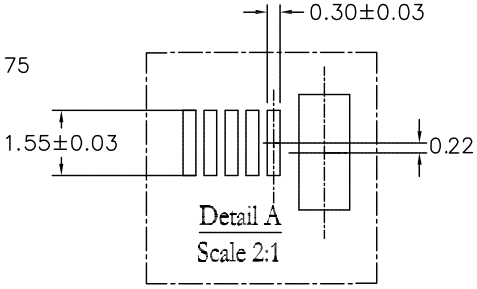

A	06.24.2015
REV	DATE

PROPRIETARY NOTE:
This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.30	APPROVED: Chris	REGO® http://www.rego.com.tw
.XX ± 0.20	CHECKED: Denny	
.XXX± 0.15	DRAWN: Bryan	TITLE: M.2 (NGFF) Connector 8.5H
X° ± 3°	UNITS: mm / SCALE: NONE	PART NO: 8038402-67G00M7T
		SHEET: 2 OF 2