NOTES:

1. MATERIAL:
   1−1 Housing: Engineering plastic, LCP with G.F reinforced, black per UL 94V−0 rate.
   1−2 Terminal: Phosphor Bronze, per JIS 5210 , 0.2t
   1−3 Metal cover: SUS304 0.2t.

2. PLATING:
   2−1 CONTACTS: 0.25 μm (10 μ") gold plating in contact area, and underplated with 1.27 μm (50 μ") min. Nickel over all.
   2−2 Solder zone: 2.54 μm (100 μ") matte Tin, 1.27 μm (50 μ") min. Nickel underplating over all.

3. RoHS compliant produsts.

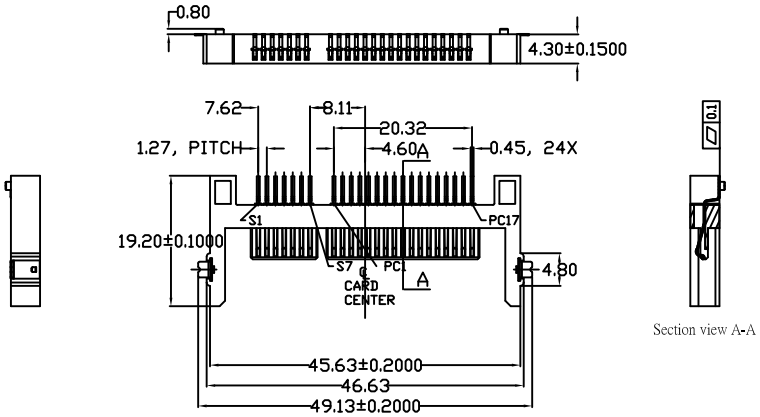

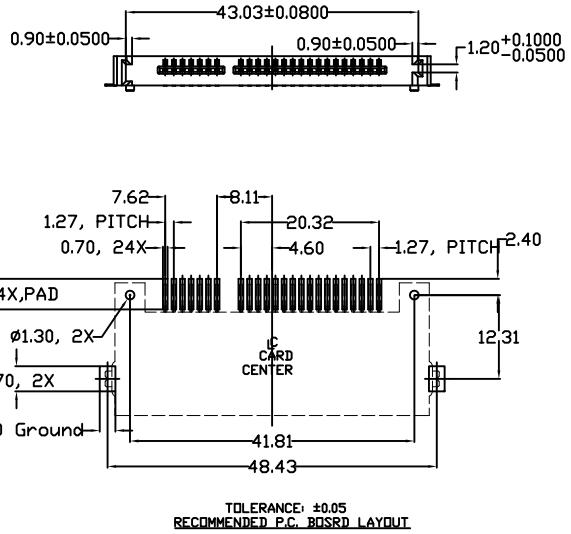

TOLERANCE: ±0.05
RECOMMENDED P.C. BOSRD LAYOUT

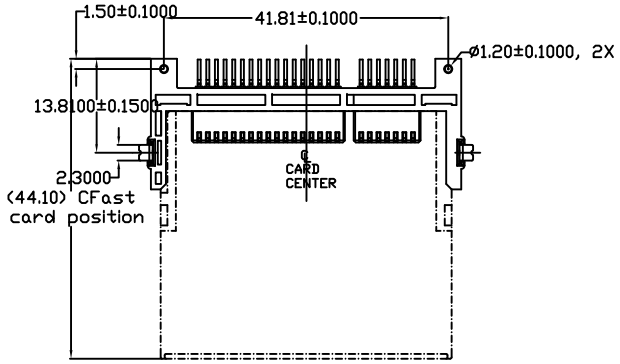



A	RELEASE	06.24.2014
REV	DESCRIPTION	DATE

PROPRIETARY NOTE:
This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.30	APPROVED: Chris	REGO® http://www.rego.com.tw
.XX ± 0.20	CHECKED: Denny	
.XXX± 0.15	DRAWN: Bryan	TITLE: CFast Host Connector Type I & Type II Push Pull w/o Shield Reverse mount H=4.3mm
X° ± 3°	UNITS: mm / SCALE: NONE	PART NO: 821101−1100100
		SHEET: 1 OF 1