

■ PART NO.
 697-FPC05PSN-H20- xx x L
 Series _____ L: Low Pb
 No. Of Contacts : _____
 04- 60 pin T: Tube R: Reel



Electrical Characteristics :
 Current rating : 0.5A AC / DC
 Voltage rating : 50V AC / DC
 Temperature range : -25°~+85°
 Withstand Voltage : 200V AC / Minute
 Contact Resistance : ≤20mΩ
 Insulation Resistance : ≥500mΩ

Material Description:
 Terminal : Phosphor Bronze Tin-Plated
 Fitting Nail : Brass Tin-plated
 Housing : Thermoplastic (UL94V-0)
 Slider : Thermoplastic (UL94V-0)


★ Available Number of Contacts

pin	DIMA	DIMB	DIMC	DIMD	pin	DIMA	DIMB	DIMC	DIMD	pin	DIMA	DIMB	DIMC	DIMD
* 04	6.4	3.5	1.5	2.6	* 23	15.9	13.0	11.0	12.1	* 42	25.4	22.5	20.5	21.6
* 05	6.9	4.0	2.0	3.1	* 24	16.4	13.5	11.5	12.6	* 43	25.9	23.0	21.0	22.1
* 06	7.4	4.5	2.5	3.6	* 25	16.9	14.0	12.0	13.1	* 44	26.4	23.5	21.5	22.6
* 07	7.9	5.0	3.0	4.1	* 26	17.4	14.5	12.5	13.6	* 45	26.9	24.0	22.0	23.1
* 08	8.4	5.5	3.5	4.6	* 27	17.9	15.0	13.0	14.1	* 46	27.4	24.5	22.5	23.6
* 09	8.9	6.0	4.0	5.1	* 28	18.4	15.5	13.5	14.6	* 47	27.9	25.0	23.0	24.1
* 10	9.4	6.5	4.5	5.6	* 29	18.9	16.0	14.0	15.1	* 48	28.4	25.5	23.5	24.6
* 11	9.9	7.0	5.0	6.1	* 30	19.4	16.5	14.5	15.6	* 49	28.9	26.0	24.0	25.1
* 12	10.4	7.5	5.5	6.6	* 31	19.9	17.0	15.0	16.1	* 50	29.4	26.5	24.5	25.6
* 13	10.9	8.0	6.0	7.1	* 32	20.4	17.5	15.5	16.6	* 51	29.9	27.0	25.0	26.1
* 14	11.4	8.5	6.5	7.6	* 33	20.9	18.0	16.0	17.1	* 52	30.4	27.5	25.5	26.6
* 15	11.9	9.0	7.0	8.1	* 34	21.4	18.5	16.5	17.6	* 53	30.9	28.0	26.0	27.1
* 16	12.4	9.5	7.5	8.6	* 35	21.9	19.0	17.0	18.1	* 54	31.4	28.5	26.5	27.6
* 17	12.9	10.0	8.0	9.1	* 36	22.4	19.5	17.5	18.6	* 55	31.9	29.0	27.0	28.1
* 18	13.4	10.5	8.5	9.6	* 37	22.9	20.0	18.0	19.1	* 56	32.4	29.5	27.5	28.6
* 19	13.9	11.0	9.0	10.1	* 38	23.4	20.5	18.5	19.6	* 57	32.9	30.0	28.0	29.1
* 20	14.4	11.5	9.5	10.6	* 39	23.9	21.0	19.0	20.1	* 58	33.4	30.5	28.5	29.6
* 21	14.9	12.0	10.0	11.1	* 40	24.4	21.5	19.5	20.6	* 59	33.9	31.0	29.0	30.1
* 22	15.4	12.5	10.5	11.6	* 41	24.9	22.0	20.0	21.1	* 60	34.4	31.5	29.5	30.6
										* 64	36.4	33.5	31.5	32.6

Applicable FPC

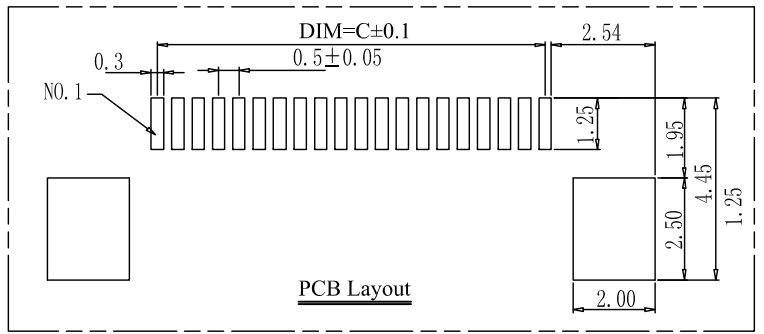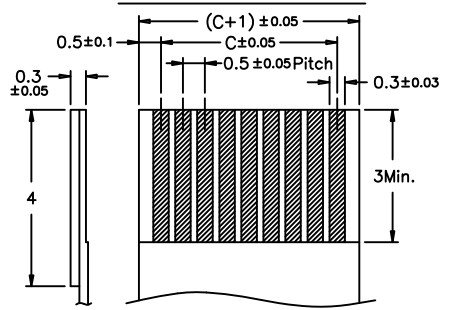

PROPRIETARY NOTE:
 This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.30	APPROVED: Chris	 http://www.rego.com.tw
.XX ± 0.20	CHECKED: Denny	
.XXX ± 0.15	DRAWN: Bryan	
X* ± 3'	UNITS: mm	SCALE: NONE
TITLE: 0.5mm FPC FFC Front lock cover 2.0h_Lower contact connector		PART NO: 697-FPC05PSN-H20-xxRL
SHEET: 1 OF 1		

A	22.5.2017
REV	DATE