
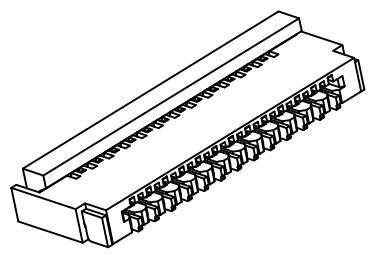

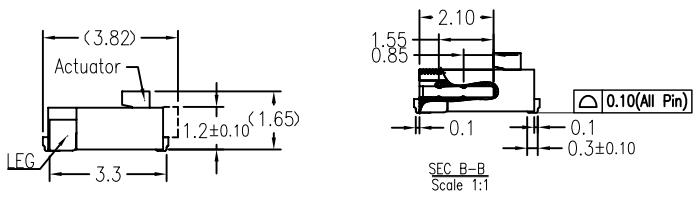
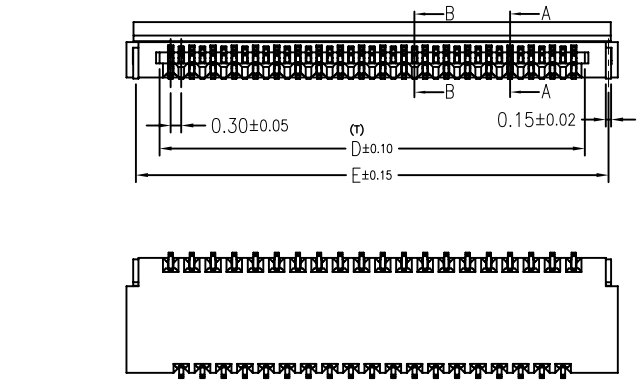


NOTES:
 1. HUOSING: HIGH-TEMP THERMOPLASTIC UL94V-0
 COLOR: BLACK
 2. ACTUATOR: HIGH-TEMP THERMOPLASTIC UL94V-0
 COLOR: MAPLE
 3. TERMINAL: COPPER ALLOY
 PLATING: GOLD FLASH
 4. FITTING NAIL: COPPER ALLOY
 PLATING: MATTE-TIN


■ PART NO.
 697-FPC03PSMN-H12-XX X L

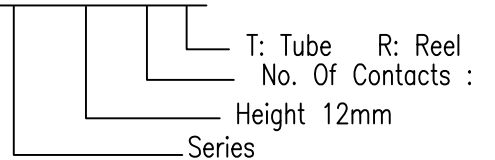


3D Drawing

★ Available Number of Contacts

No. of Contacts	Dimension				
	A	B	C	D	E
★ 13	6.10	3.00	3.60	4.23	5.57
★ 15	6.70	3.60	4.20	4.83	6.17
17	7.30	4.20	4.80	5.43	6.77
19	7.90	4.80	5.40	6.03	7.37
★ 21	8.50	5.40	6.00	6.63	7.97
★ 23	9.10	6.00	6.60	7.23	8.57
★ 25	9.70	6.60	7.20	7.83	9.17
27	10.30	7.20	7.80	8.43	9.77
29	10.90	7.80	8.40	9.03	10.37
★ 31	11.50	8.40	9.00	9.63	10.97
★ 33	12.10	9.00	9.60	10.23	11.57
35	12.70	9.60	10.20	10.83	12.17
37	13.30	10.20	10.80	11.43	12.77
★ 39	13.90	10.80	11.40	12.03	13.37
★ 41	14.50	11.40	12.00	12.63	13.97
★ 45	15.70	12.60	13.20	13.83	15.17
49	16.90	13.80	14.40	15.03	16.37
★ 51	17.50	14.40	15.00	15.63	16.97
★ 51 (m)	17.50	14.40	15.00	15.94	16.97
57	19.30	16.20	16.80	17.43	18.77
★ 61	20.50	17.40	18.00	18.63	19.97
67	22.30	19.20	19.80	20.43	21.77
71	23.50	20.40	21.00	21.63	22.97
73	24.10	21.00	21.60	22.23	23.57

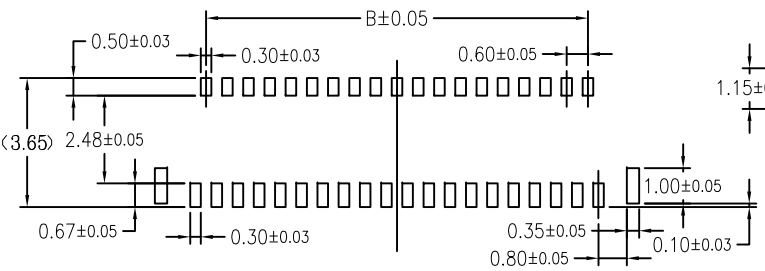


FPC/FFC Insert Direction
 Recommended P.C.B Layout

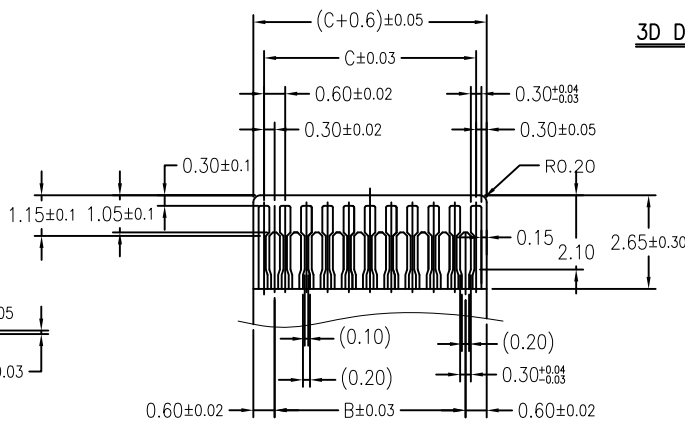

Applicable FPC

PROPRIETARY NOTE:

This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.30	APPROVED: Chris	 http://www.rego.com.tw
.XX ± 0.20	CHECKED: Denny	
.XXX ± 0.15	DRAWN: Bryan	
X* ± 3'	UNITS: mm	SCALE: NONE
PART NO: 697-FPC03PSMN-H12-xxRL		TITLE: 0.3mm FPC-FFC connector rear lock cover double side contact_1.2h
SHEET: 1 OF 1		

A	24.7.2017
REV	DATE