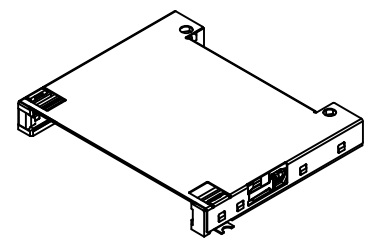
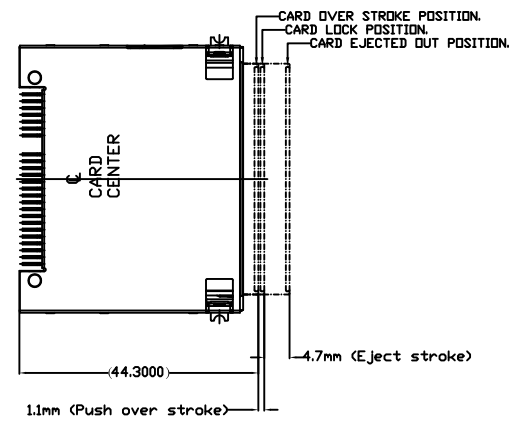


TOLERANCE: ±0.1
RECOMMENDED P.C.B LAYOUT





NOTES:

1. MATERIAL:
 - 1-1 Housing: Engineering plastic, LCP with G.F reinforced, black per UL 94V-0 rate.
 - 1-2 Slider: Engineering plastic, LCP with G.F reinforced, black per UL94 V-0 rate.
 - 1-3 Terminal: Phosphor Bronze, per JIS 5210 ,0.2t
 - 1-4 Spring: Piano thread
 - 1-5 Metal cover: Stainless steel sheet SUS304 0.2t.
 - 1-6 Crank: Stainless rod SUS 304.
 - 1-7 Card lock: Stainless steel SUS 304.
2. PLATING:
 - 2-1 CONTACTS: 0.25 μm (10 μ") gold plating in contact area, and underplated with 1.27 μm (50 μ") min. Nickel over all.
 - 2-2 Solder zone: 2.54 μm (100 μ") matte Tin, 1.27 μm (50 μ") min. Nickel underplating over all.
3. RoHS compliant products.
4. OPERATING TEMPERATURE: -40°C~+85°C

PROPRIETARY NOTE:

This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.30	APPROVED: Chris	 http://www.rego.com.tw
.XX ± 0.20	CHECKED: Denny	
.XXX ± 0.15	DRAWN: Bryan	
X° ± 3'		
	UNITS: mm	SCALE: NONE
TITLE: cFast Host Connector Type I & Type II Push Push with Shield H=6.05mm		PART NO: 821101-1100030
SHEET: 1		OF 1

A	RELEASE	06.24.2014
REV	DESCRIPTION	DATE