

A

B

C

D

E

F

A


B

C

D


E

F




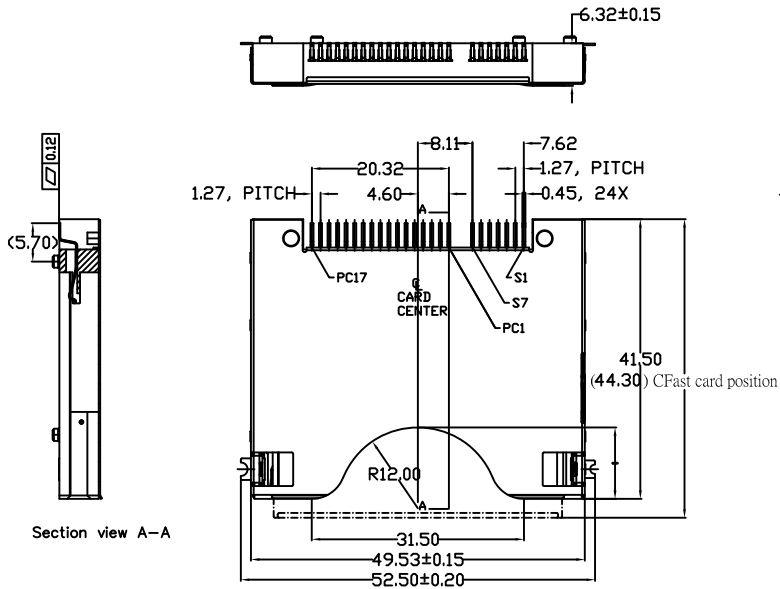


NOTES:



1. MATERIAL:
 - 1-1 Housing: Engineering plastic, LCP with G.F reinforced, black per UL 94V-0 rate.
 - 1-2 Terminal: Phosphor Bronze, per JIS 5210, 0.2t
 - 1-3 Metal cover: Stainless steel sheet SUS304 0.2t.
2. PLATING:
 - 2-1 CONTACTS: 0.25 μm (10 μ") gold plating in contact area, and underplated with 1.27 μm (50 μ") min. Nickel over all.
 - 2-2 Solder zone: 2.54 μm (100 μ") matte Tin, 1.27 μm (50 μ") min. Nickel underplating over all.
3. RoHS compliant products.
4. OPERATING TEMPERATURE: -40°C~+85°C



Section view A-A

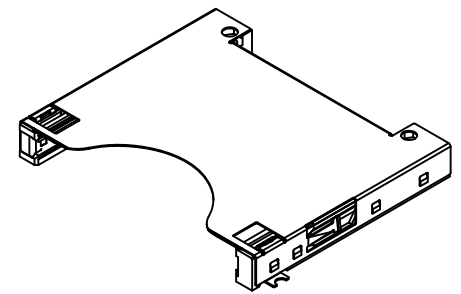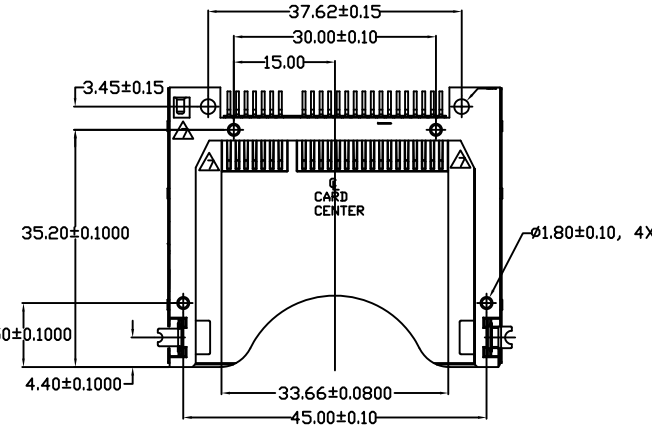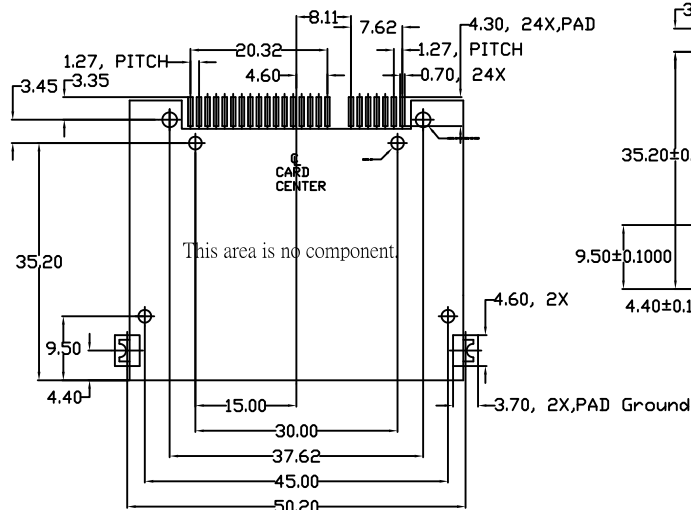

TOLERANCE: ±0.10
RECOMMENDED P.C. BOARD LAYOUT

<p>PROPRIETARY NOTE: This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.</p>			
.X ± 0.30	APPROVED:	Chris	 http://www.rego.com.tw CFast Host Connector Type I & II Push Pull with Shield H=6.05mm PART NO: 821101-1100080
.XX ± 0.20	CHECKED:	Denny	
.XXX ± 0.15	DRAWN:	Bryan	
X* ± 3'	UNITS:	SCALE:	
	mm	NONE	SHEET: 1 OF 1

A	RELEASE	06.24.2014
REV	DESCRIPTION	DATE