




**NOTES:**

- MATERIAL:**
  - 1-1 Housing: Engineering plastic, LCP with G.F reinforced, black per UL 94V-0 rate.
  - 1-2 Terminal: Phosphor Bronze, per JIS 5191, 0.2t
  - 1-3 Metal cover: Stainless steel sheet SUS304, 0.2t.
- PLATING:** Solder zone: 0.381  $\mu$ m (15  $\mu$ "") gold plating in contact area.  
2.54  $\mu$ m (100  $\mu$ "") matte Tin, 1.27  $\mu$ m (50  $\mu$ "") min. Nickel underplating over all.
- RoHS compliant products.**
- OPERATING TEMPERATURE:** -25°C ~ +85°C
- ELECTRONICAL SPECIFICATION:**
  - CURRENT : DC 0.5A
  - VOLTAGE : DC 5V
  - D.W. VOLTAGE : AC 500Vrms/min.

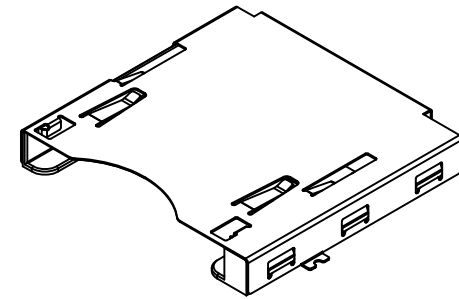

**PROPRIETARY NOTE:**

This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.30	APPROVED:	 <a href="http://www.rego.com.tw">http://www.rego.com.tw</a>
.XX ± 0.20	CHECKED:	
.XXX ± 0.15	DRAWN:	
X* ± 3'	Chris	Denny
	Bryan	TITLE: CF EXPRESS HOST CONNECTOR MANUAL TYPE
	UNITS:	SCALE:
	mm	NONE
	PART NO: 821101-1120020	SHEET: 1 OF 1

A	11.1.2018
REV	DATE