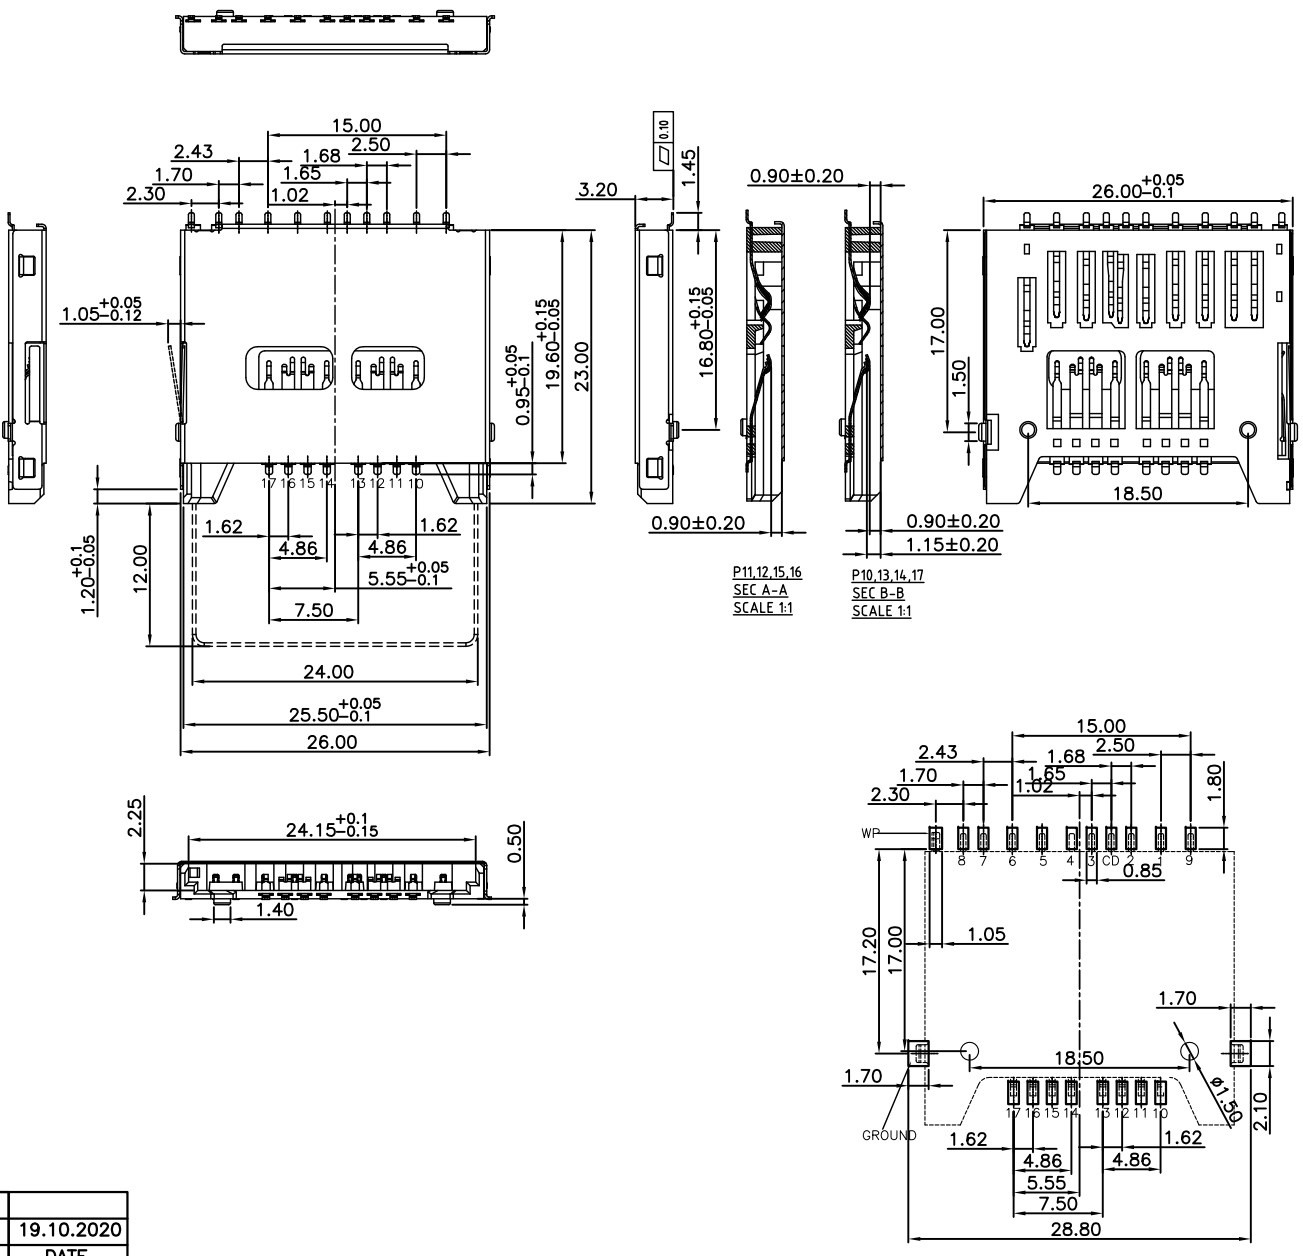





- NOTES :
- MATERIAL :
    - HOUSING:LCP UL94 S475 V-0, BLACK COLOR.
    - SHELL: Stainless Steel SUS304.
    - CONTACT: Copper alloy C5210.
  - FINISH :
    - CONTACT: GOLD PLATING ON CONTACT AREA, MATTE TIN 100u"MIN ON SOLDERTAIL AREA. 50u" MIN NICKEL PLATING OVERALL.
    - SHELL: 30u" MIN NICKEL PLATING OVERALL. Au 1u"MIN ON SOLDERTAIL AREA.
  - Electrical Characteristics:
    - Operating voltage : 100V AC(rms)/DC.
    - Current rating : 0.5 A.
    - Operating Temperature: -25°C~+85°C.
    - Contact resistance: 100 m ohms max.
    - Insulation resistance: 1000M ohms min. at 250VDC.
    - Dielectric withstanding voltage:500 VAC/1minute.



Pin No.	SD MODE	Pin No.	USH MODE
1	CD/DAT3	10	Vss3
2	CMD	11	DO+
3	Vss1	12	DO-
4	VDD	13	Vss4
5	CLK	14	VDD2
6	Vss2	15	D1-
7	DAT0	16	D1+
8	DAT1	17	Vss5
9	DAT2		

**PROPRIETARY NOTE:**  
This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.30	APPROVED: Chris	 <a href="http://www.rego.com.tw">http://www.rego.com.tw</a>
.XX ± 0.20	CHECKED: Andy	
.XXX ± 0.15	DRAWN: Vic	
X* ± 3'		
	UNITS: mm	SCALE: NONE
	TITLE: SD4.0 Connector Push-Pull H:3.2mm PART NO: 9177SD40-FA0006 SHEET: 1 OF 1	

A	19.10.2020
REV	DATE