

Mating Angle Illustration  
Scale 2:1

**Material:**

Housing: High Temperature Plastic UL94V-0, Black.

Contacts: Copper Alloy.

Solder Pad: Metal, Matte Tin Plated.

**Electrical Characteristics:**



Current Rating: 0.5 AMP.

Insulator Resistance: 500MΩ min. at DC 500V.


Contact Resistance: 55mΩ max.

Operating Temperature: -40°C~+80°C.

**\*RoHS Compliant**

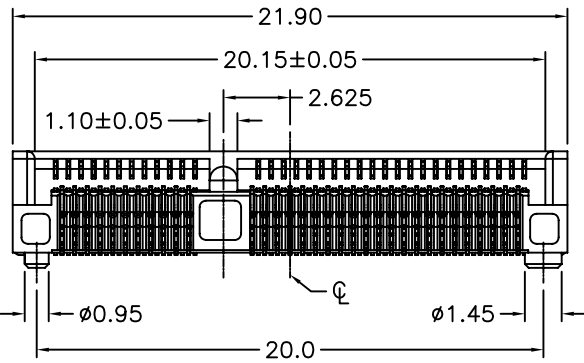


8038402- 67 G 00 E 5 T  
 Series ———  
 No. of Pin ———  
 Count ———  
 G: Gold Plated ———  
 00: G/F ———  
 T: Tape & Reel  
 Package  
 5: 4.0mm Height  
 E: Key E

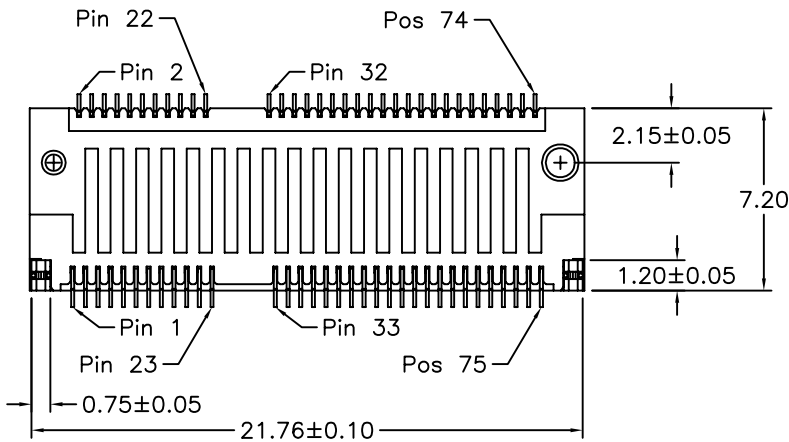

PROPRIETARY NOTE:

This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.30	APPROVED: Chris	 <a href="http://www.rego.com.tw">http://www.rego.com.tw</a>
.XX ± 0.20	CHECKED: Denny	
.XXX ± 0.15	DRAWN: Bryan	
X* ± 3'		
UNITS: mm	SCALE: NONE	TITLE: M.2 (NGFF) CONNECTOR 4.2H E KEY
SHEET: 1 OF 2		PART NO: 8038402-67G00E5T

A	11.13.2015
REV	DATE

