



SECTION A-A

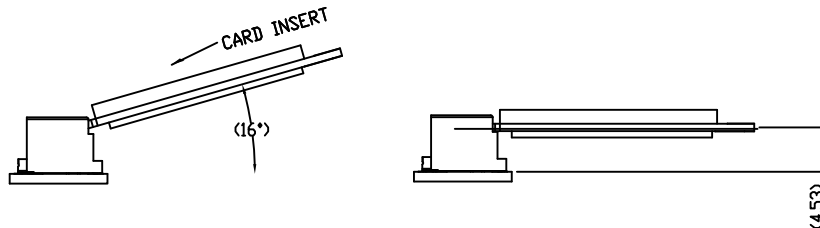

MATING CONDITION SCALE: 2:1


ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	BODY	1	LCP(E4711)	UL94-V0; BLACK
2	CONTACT	67	C5210R-EH	CONTACT AREA:GOLD PLATING SOLDER AREA:GOLD FLASH UNDER PLATING: NICKEL 50u"
4	HOLD DOWN	2	C2680R-H	TIN 100u" UNDER PLATING: NICKEL 50u"

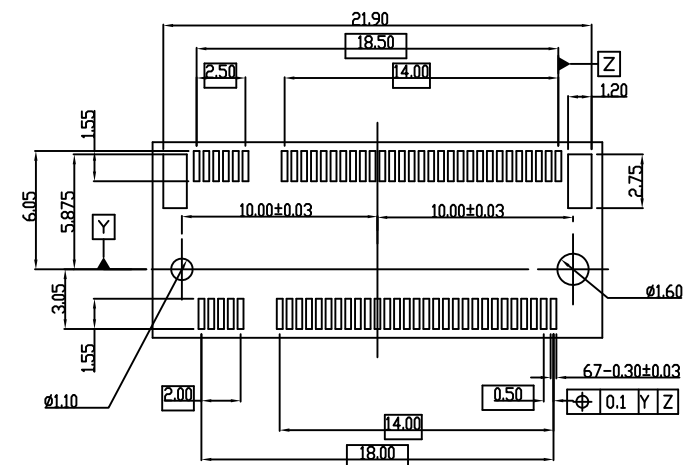

RECOMMEND NGFF MINI CARD MOUNTING TYPE\_SMT\_PCB OUTLIN :  
GENERAL TOLERANCE ±0.05mm




PROPRIETARY NOTE:

This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.30	APPROVED: Chris	 http://www.rego.com.tw
.XX ± 0.20	CHECKED: Andy	
.XXX ± 0.15	DRAWN: Vic	
X° ± 3'		TITLE: M.2 Connector 5.8H B Key Type
UNITS: mm	SCALE: NONE	PART NO: 906M2-045B0
		SHEET: 1 OF 2

0	19.8.2017
REV	DATE

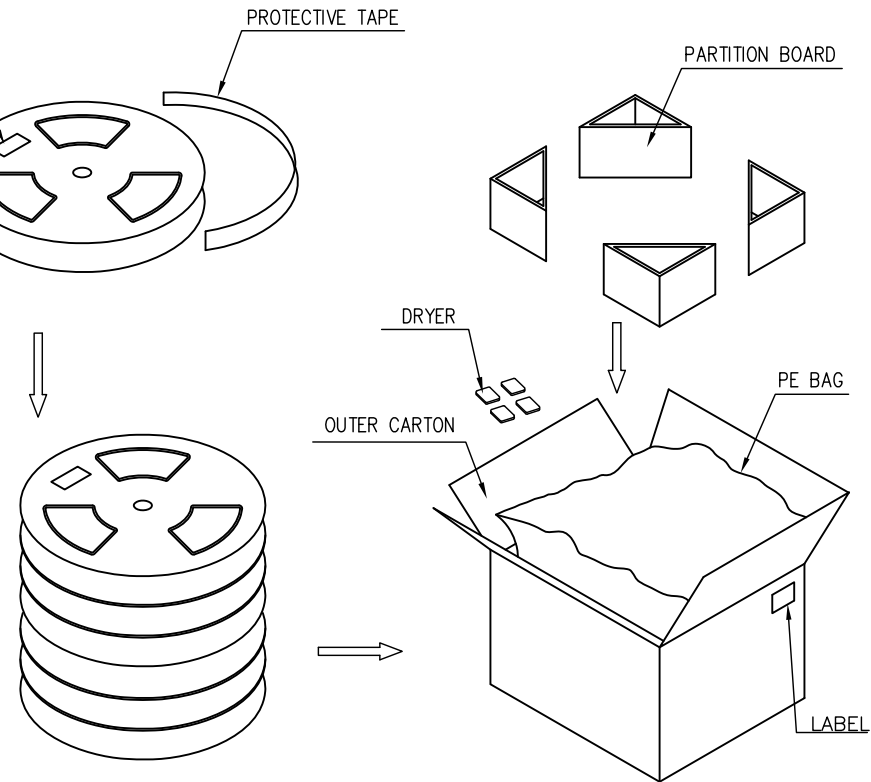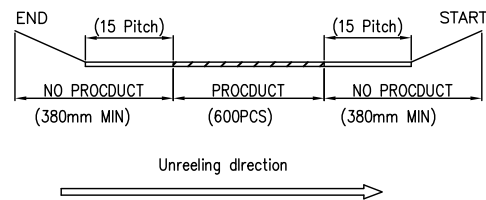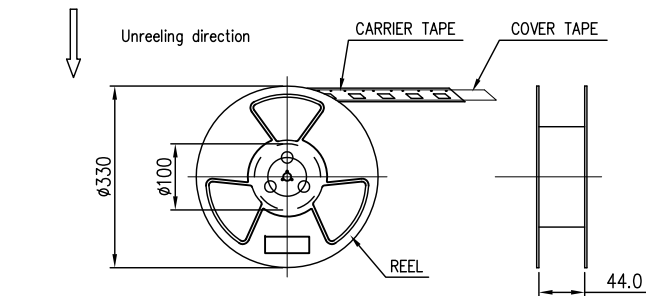

- NOTES:
1. PACKING STYLE : 600 PCS/REEL  
3600 PCS/OUTER CARTON
  2. MATERIAL CARRIER TAPE: PS BLACK  
COVER TAPE: PET FILM  
REEL: PLASTIC
  3. PEEL STRENGTH OF COVER TAPE: 20-80g (PEEL SPEED 300mm/MINUTE).



0	19.8.2017
REV	DATE

PROPRIETARY NOTE:

This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.30	APPROVED:		 <a href="http://www.rego.com.tw">http://www.rego.com.tw</a>
.XX ± 0.20	Chris		
.XXX± 0.15	CHECKED:		
X° ± 3°	Andy		
	DRAWN:		TITLE: M.2 Connector 5.8H B Key Type
	Vic		
	UNITS:	SCALE:	PART NO: 906M2-045B0
	mm	NONE	SHIFT: 2 OF 2