

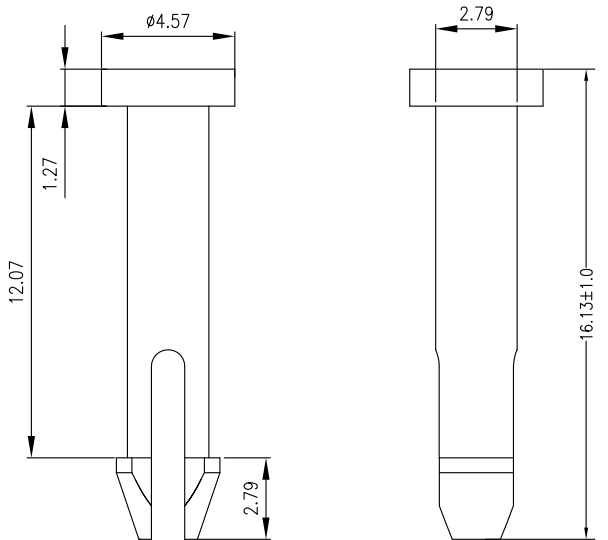


A
B
C
D
E
F

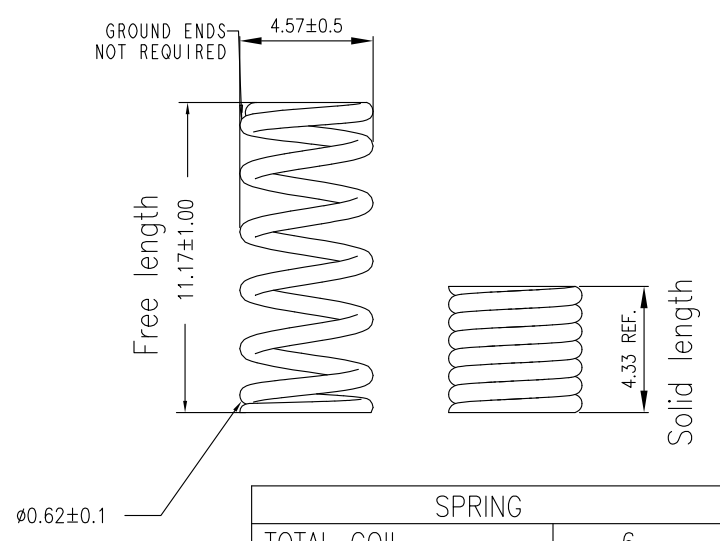


NOTES
1. MATERIAL: BRASS C6801
2. FINISH: ANTI-OXIDATION
3. HOLE IN PCB $\varnothing 3.1 \pm 0.05$
HOLE IN HEAT SINK $\varnothing 3.4 \pm 0.05$

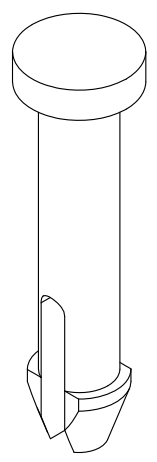

SPRING	
TOTAL COIL	6
OUTSIDE DIAMETER	$\varnothing 4.57$
SPRING DIAMETER	$\varnothing 0.62 \pm 0.1$
TOTAL LENGTH	11.17 ± 1.0

NOTES
1. MATERIAL: SWP
2. FINISH: BRIGHT NICKEL
3. SPRING RATE:

Free Length	ref. 11.17mm			
Deflection (mm)	1	2	3	6
Operating length (mm)	10.2	9.2	8.2	5.2
Load at operating length (ref. KgF)	0.242	0.57	0.89	1.998

PROPRIETARY NOTE: This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.			
.X ± 0.5	APPROVED: Chris	 http://www.rego.com.tw	
.XX ± 0.35	CHECKED: Denny		
.XXX ± 0.2	DRAWN: Vicky		
X* $\pm 3^*$		TITLE: COPPER PUSH PIN $\varnothing 4.5 \times 16.13$ + SPRING $\varnothing 0.62 \times 11.17L, 6coil$	
	UNITS: mm	SCALE: NONE	PART NO: F049-000001
			SHEET: 1 OF 1

A
B
C
D
E
F