


- NOTES
1. MATERIAL: BRASS C6801
  2. FINISH: ANTI-OXIDATION
  3. HOLE IN PCB  $\phi 3.1 \pm 0.05$   
HOLE IN HEAT SINK  $\phi 3.3 \pm 0.05$

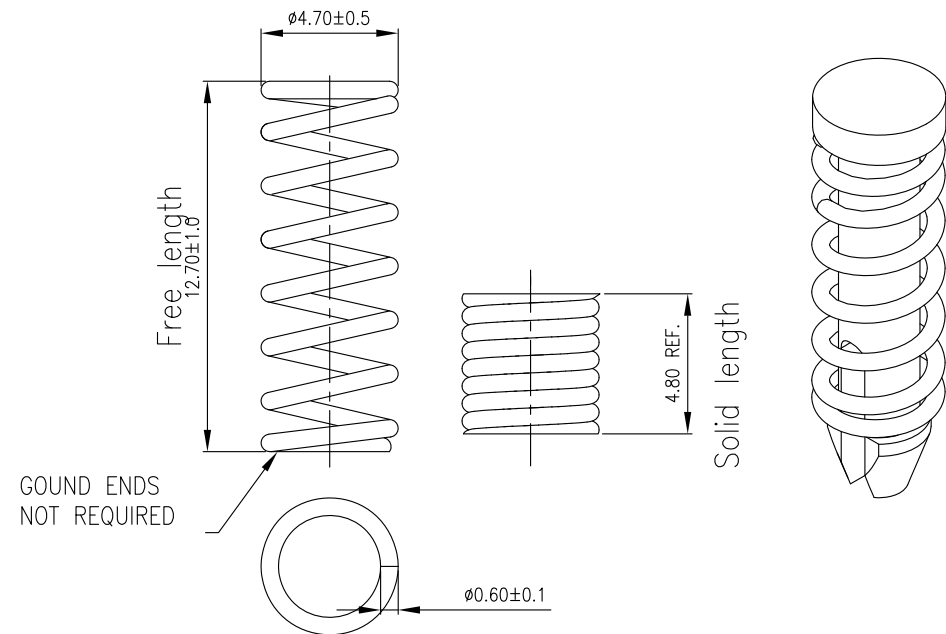

GROUND ENDS  
NOT REQUIRED


- NOTES
1. MATERIAL: SWP
  2. FINISH: BRIGHT NICKEL
  3. SPRING RATE:

SPRING	
TOTAL COIL	7
OUTSIDE DIAMETER	$\phi 4.7$
SPRING DIAMETER	$\phi 0.6 \pm 0.1$
TOTAL LENGTH	$12.7 \pm 1.0$

Free Length	ref. 12.7mm			
Deflection (mm)	1	2	3	8
Operating length (mm)	11.7	10.7	9.7	4.7
Load at operating length (ref. KgF)	0.22	0.47	0.822	1.984

PROPRIETARY NOTE:

This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X $\pm 0.5$	APPROVED: Chris	 <a href="http://www.rego.com.tw">http://www.rego.com.tw</a>
.XX $\pm 0.35$	CHECKED: Denny	
.XXX $\pm 0.2$	DRAWN: Vicky	
X* $\pm 3^*$	UNITS: mm	SCALE: NONE
TITLE: COPPER PUSH PIN $\phi 4.572 \times 17.862$ + SPRING $\phi 0.6 \times 12.7L, 7\text{coil}$		PART NO: F049-000002
SHEET: 1 OF 1		