


- NOTES
1. MATERIAL: BRASS C6801
 2. FINISH: ANTI-OXIDATION
 3. HOLE IN PCB $\varnothing 3.1 \pm 0.05$
HOLE IN HEAT SINK $\varnothing 3.3 \pm 0.05$



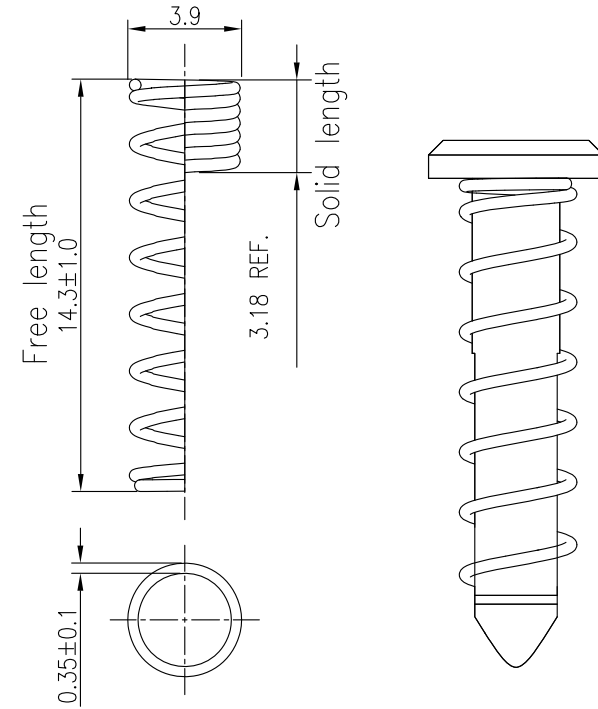

- NOTES
1. MATERIAL: SWP
 2. FINISH: BRIGHT NICKEL
 3. SPRING RATE:

SPRING	
TOTAL COIL	6
OUTSIDE DIAMETER	$\varnothing 3.9$
SPRING DIAMETER	$\varnothing 0.35 \pm 0.1$
TOTAL LENGTH	14.3 ± 1.0

Free Length	ref. 14.3mm			
Deflection (mm)	2	4	6	10
Operating length (mm)	12.3	10.3	8.3	4.3
Load at operating length (ref. KgF)	0.072	0.186	0.314	0.616

PROPRIETARY NOTE:

This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.5	APPROVED: Chris		 REGO® http://www.rego.com.tw
.XX ± 0.35	CHECKED: Denny		
.XXX± 0.2	DRAWN: Vicky		
X° ± 3°			
	UNITS: mm	SCALE: NONE	TITLE: COPPER PUSH PIN Ø6X18.06 + SPRING Ø0.35X14.3L,6coil
			PART NO: F049-000003
			SHEET: 1 OF 1