
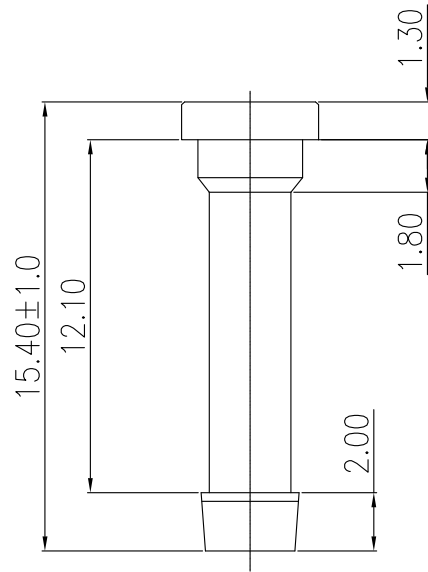
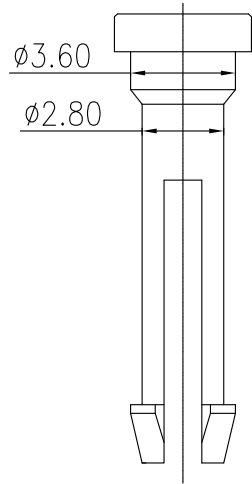




SPRING	
TOTAL COIL	6
OUTSIDE DIAMETER	ø4.85
SPRING DIAMETER	ø0.6±0.1
TOTAL LENGTH	12.7±1.0



NOTES

1. MATERIAL: BRASS C6801
2. FINISH: ANTI-OXIDATION
3. HOLE IN PCB $\bullet \text{ } \phi 3.1 \pm 0.05$ WITH INSERTED PIN INSTALLED
 $\bullet \text{ } \phi 3.0 \pm 0.05$ WITHOUT INSERTED PIN INSTALLED
 HOLE IN HEAT SINK $\phi 3.3 \pm 0.05$
4. THE COPPER PUSH PIN & THE INSERTED PIN CANNOT BE PRE-ASSEMBLED ON HEAT SINK, THEY WILL BE ONLY USED WHEN YOU ASSEMBLE HEATSINK ON PCBA

INSERTED PIN

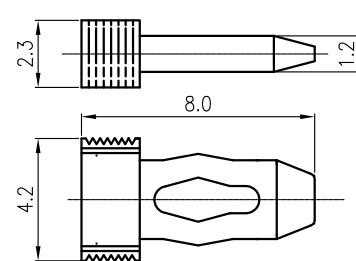

Note
1. Material: LEONA PA66 / FR370

NOTES

1. MATERIAL: SWP
2. FINISH: BRIGHT NICKEL
3. SPRING RATE:

Free Length	ref. 12.7mm			
Deflection (mm)	1	2	4	8
Operating length (mm)	11.7	10.7	8.7	4.7
Load at operating length (ref. KgF)	0.326	0.596	1.18	2.02

PROPRIETARY NOTE:

This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.5	APPROVED: Chris	 http://www.rego.com.tw
.XX ± 0.35	CHECKED: Denny	
.XXX ± 0.2	DRAWN: Vicky	
X* $\pm 3^*$	UNITS: mm	SCALE: NONE
		TITLE: COPPER PUSH PIN $\phi 4.7 \times 15.4$ + SPRING $\phi 0.6 \times 12.7$ L6coil
PART NO: F049-000006		SHEET: 1 OF 1