

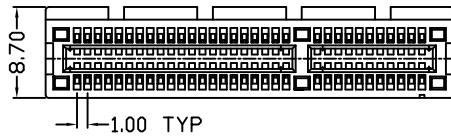
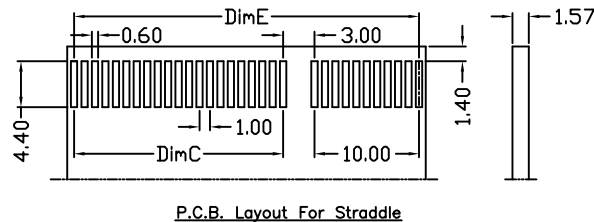
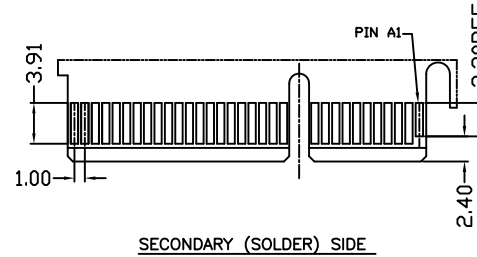
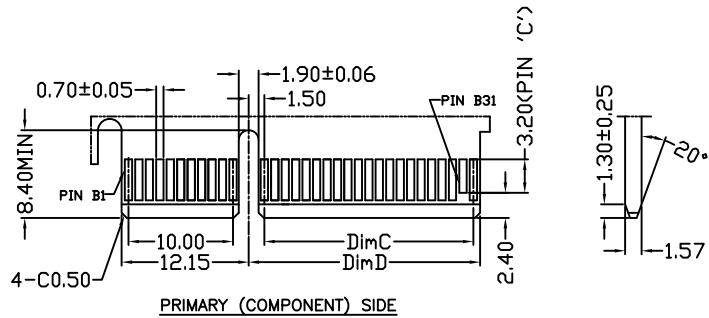


A
B
C
D
E
F



	DIM 'A'	DIM 'B'	DIM 'C'	DIM 'D'	DIM 'E'	Pin'C'
36P	7.65	25.00	6.00	8.15	19.00	A1,B17
64P	21.65	39.00	20.00	22.15	33.00	A1,B17,B31
98P	38.65	56.00	37.00	39.15	50.00	A1,B17,B31,B48
164P	71.65	89.00	70.00	72.15	83.00	A1,B17,B31,B48,B81

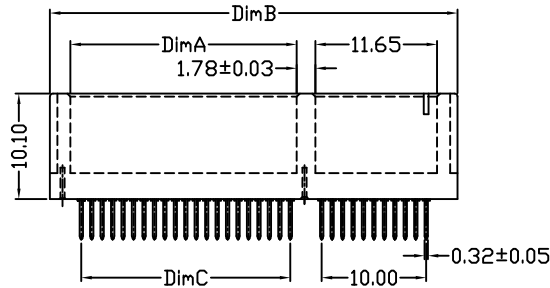

NOTES:

***Material**

Body : Nylon9T, UL 94V-0 Rated.

Color: Black.

Contacts: Brass

Plating: Au plating on contact area;

Sn(100u" Min.) plating on solder tail;

Ni(50u" Min.) underplating overall.

***Mechanical:**

Insertion Force: 1.15N max per contact pair;

Withdrawal Force: 0.15N min per contact pair;

Contact Retention Force: 3.43N min per contact;

***Electrical Specification**

Contact Resistance : 30 Milliohms Max.

Current Rating : 1.1 Ampere

Insulation Resistance : 1000 Megohms Min, At 500V AC.


***Environmental**

Operating Temperature : -55°c to +105°c

This product should be in use in 168 hours after the vacuum packaging is opened. If the product cannot be used up in 168 hours please vacuum the packing. If the vacuum packaging cannot be restored, please bake the product before production.


Baking condition: 150°C/4H or 180°C/2H.

***How to order:**

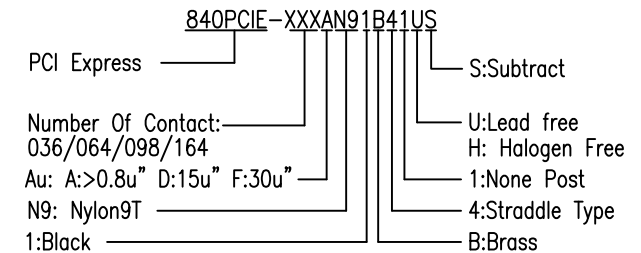

REV	DATE
I	10.8.2020

PROPRIETARY NOTE:
This document contains confidential information and proprietary to Rego Electronics and shall not be reproduced or disclosed to other documents or used for any purpose other than that for which was obtained without the expressed written consent of Rego Electronics.

.X ± 0.35	APPROVED: Chris	 http://www.rego.com.tw
.XX ± 0.25	CHECKED: Andy	
.XXX ± 0.15	DRAWN: Vic	
X* ± 3'	UNITS: mm	SCALE: NONE
TITLE: PCI Express Connector Straddle SMT , Strip Form Pins		PART NO: 840PCIE-xxxAN91B41US
SHEET: 1		DF 1